

Genuine Accessories



Vehicle Model G70

Model Year 2019-
 Part No. G9F46 AK100 (DIO)
G9F46 AK150 (PIO)
 Language English
 Rev. Date 12/21/2017

Accessory: Mudguards, Rear

Difficulty: B

Note: Difficulty stated above reflects the minimum level of expertise required to install the accessory:
 (A) Customer
 (B) Dealer Technician
 (C) Master Technician or Specialist

Instructional Symbols / Definitions

	Denotes warnings that may lead to serious physical injury or vehicle damage		Denotes quality processes to be checked prior to moving to the next step	Denotes personal protective equipment (PPEs) that may be required for a step. Examples of safety equipment icons noted below:	
	Denotes cautions to be taken to avoid physical injury or electronic component damage		Denotes specific tools that are necessary to complete a step		
	Denotes cautions to be taken to avoid vehicle and component damage	N O T E	Denotes important information to be reviewed during the step		
				Glasses	Gloves
				Mask	Hearing Protection

Basic Required Tools

Right Angle #2 Phillips Screwdriver	Clip Removal Tool	#2 Phillips Screwdriver

Part Weight (Gross)
0.43 lbs
0.20 kg

All dealers must determine if the weight they have added in the form of all options or accessories, when added to the weight of all Port/Dealer Installed options or accessories, exceeds the lesser of 1.5% of GVWR or 100 lbs. If the additional weight does exceed the lesser of the indicated thresholds, a "Load Carrying Capacity Reduced" label must be installed. A black, fine-point, indelible marker must be used to write by hand onto the label, the reduced carrying capacity in kilograms or pounds, which is the total weight of all added options and accessories. Load Label Part Number: NP070 - 09003

Notes to the installer:

- 1 Read the entire Installation Instructions prior to beginning the installation of the part.
- 2 Make sure the vehicle is completely clean and dry in the area(s) the part is to be installed.
- 3 Ensure the vehicle is properly protected in the area(s) that the accessory is to be installed.
- 4 NEVER place tools on painted surfaces, seating surfaces, dash pad, console or floor carpet/mats.
- 5 Always wear appropriate personal protective equipment, including gloves, safety glasses, etc., when required.

Kit Overview




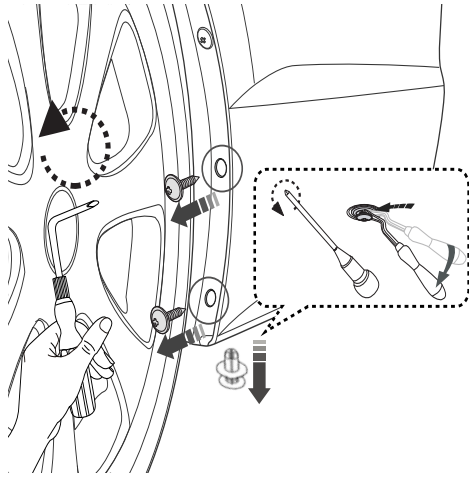
No.	Qty	Description
1	1	Rear Mudguard (LH)
2	1	Rear Mudguard (RH)
3	1	Hardware Bag


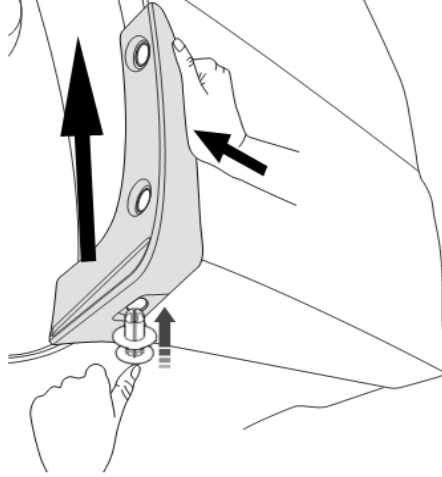

Hardware Kit Contents


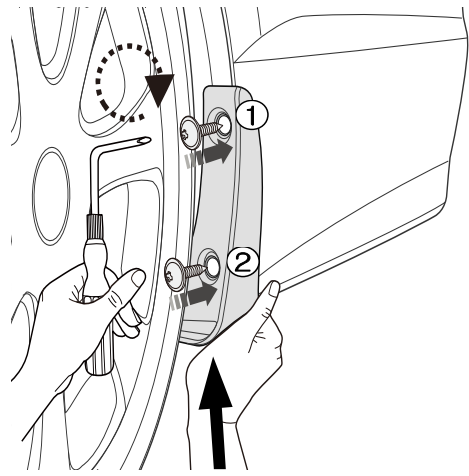

A		B	
4	Self-Tapping Screw	2	Plastic Retainer



Hardware Total
6

Genuine Accessories

1		Right Angle #2 Philips Screwdriver, Clip Removal Tool and #2 Phillips Screwdriver
		
N O T E	<p>A. If applicable, unscrew the center screw of the plastic retainer and then remove the plastic retainer from underneath the vehicle as shown using a clip removal tool.</p> <p>B. Remove the two (2) screws from the highlighted area as shown.</p> <p>C. Discard the hardware.</p>	

2		
		
N O T E	<p>A. Align the rear mudguard as shown ensuring a proper fit.</p> <p>B. Insert one (1) provided plastic retainer into the hole as shown. Make sure to push in the center portion of the plastic retainer to lock the retainer in place.</p>	
	<p>Make sure to push the rear mudguard upward and in during the installation to eliminate any possible gaps.</p>	

3		Right Angle #2 Philips Screwdriver
		
N O T E	<p>A. While pushing the rear mudguard up as shown in the drawing, insert and fasten one (1) provided screw into the upper hole as shown.</p> <p>B. Insert and fasten one (1) provided screw into the lower hole as shown.</p> <p>C. Repeat steps 1-3 for the opposite side.</p> <p>D. Installation is complete.</p>	
	<p>After the installation, check for any visible gaps. If any gap exceeds 0.5mm, loosen the mounting screws and refit the Rear Mudguard to the body to achieve the correct specification. Be careful not to over-tighten or strip the screw head.</p>	

Visual Check	Item to be Checked
	Make sure to push the Rear Mudguards upward and in during the installation to eliminate any possible gaps.
	After the installation, check for any visible gaps. If any gap exceeds 0.5mm, loosen the mounting screws and refit the Rear Mudguards to the body to achieve the correct specification. Be careful not to over-tighten or strip the head of the screw.

Result	
Rear Mudguards are properly aligned.	
Any visible gaps should not exceed 0.5mm.	